



# GM South Africa

## PRODUCT INFORMATION GUIDE

Re-Issue Dec 2007

## OPEL VIVARO VAN



## 1. CHANGES TO VIVARO VAN FROM MY07.5

The Opel Vivaro is already one of the most popular vehicles in its segment due to an excellent mix of space, engine performance, economy and specification level. It is difficult to improve a product that is already well accepted, however, from MY07.5, the Vivaro now features a stylishly designed new front-end. Through the addition of a new front bumper, front grille and re-designed front headlights, the Vivaro benefits from a more modern look and one that emphasizes the Opel design language



**Previous Model  
Vivaro Van**




**New Vivaro  
Van**

## 2. MODEL RANGE

The Opel Vivaro retains its existing engines, but added two new models to the range from September, as follows:

- 2.0 Petrol / 1.9 CDTI - Base
- High Opulence

	1.9 CDTI	2.0
Fuel	Diesel	Petrol
Displacement (cm <sup>3</sup> )	1,870	1,998
Output (kW/hp) at rpm	74/100 3,500	88/120 4,750
Max. torque (Nm) at rpm	240 2,000	190 3,750
Fuel consumption (l/100 km)	6-speed manual	6-speed manual
urban	9.3–9.6	12.8–12.9
non-urban	6.8–6.9	8.5–8.6
total	7.7–7.9	10.1–10.2
CO <sub>2</sub> emission	205–210	241–244

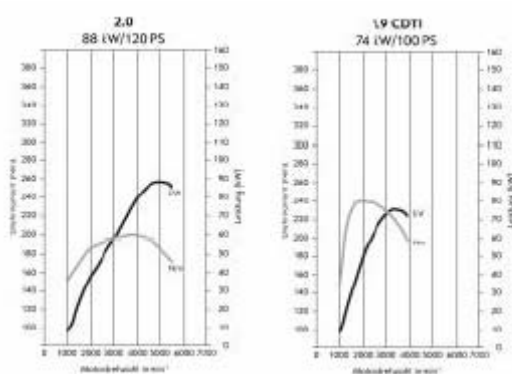

The two new “High Opulence” were introduced in September 2007 and feature the following specification over the “Base” versions :

- **Air-conditioning**
- **Radio/CD front-loader (with 2 speakers)**

### 3. INTERIOR

Perfect ergonomics, high quality standards and good operability are characteristics of the Opel Vivaro's cockpit.

#### Cargo Bay

The Vivaro offers wide opening double rear doors, together with a sliding side door on both left & right sides of the vehicle. The loading area is one of the widest in its class; combined with the very low loading height this means pallets, cartons, crates and bulky merchandise can simply be slid into place – from the back, or the sides. Vivaro's load area incorporates many unique features: for occupant safety and cargo security, Vivaro has 6 load anchoring points & the option of a full-height glazed bulkhead. Another innovative load area feature is Opel's Flex-Fix system that straps cargo to the side panels in a variety of different positions – allowing for safe transportation of any goods.



#### 4. SAFETY

Vivaro's comprehensive package of active and passive safety features include power-assisted steering, ABS, all-round disc brakes (front: air-cooled), and brake boost (for outstanding stopping power even under heavy loads) as standard.

In addition to the extremely sturdy body structure, the Vivaro protects its passengers with an extensive safety package in the driver's cab. This includes the restraint system with airbag and pyrotechnic seat-belt tensioner for driver, safety steering column, anti-submarining ramps in the seats and retractor seat belts for all front seats, with the outer front belts being height-adjustable. In the event of a collision, the fuel supply is immediately cut off to minimize the risk of fire. In addition, the fuel tank is located in the impact protection zone below the cab.



# Opel Vivaro

2.0      2.0 High Opulence      1.9 CDTI      1.9 CDTI High Opulence

## Engine Data

Capacity (cc)	1998	1870
Cylinders	4	4
Fuel supply	MPFI	CDTI
Power (kW) @ r/min	88@4750	74@3500
Torque (Nm) @ r/min	190@3750	240@2000

## Performance

0 to 100 km/h (sec)	14.6	16.5
Top speed (km/h)	163	155

## Consumption

l/100km @ 100km/h	10.1	7.7
(Urban)	12.8	9.3
(Non-urban)	8.5	6.8

## Safety & Convenience

### Exterior features

Bumpers - black	•	•	•	•
Side mouldings - black	•	•	•	•
Mirrors o/s – oversize, black, electric	•	•	•	•
High mounted stop lamp	•	•	•	•
Left & Right Sliding doors	•	•	•	•
Double rear doors	•	•	•	•

### Interior features

Windows – power operated	•	•	•	•
Air bag – driver	•	•	•	•
Alarm & immobiliser	•	•	•	•
Steering – power assisted, tiltable	•	•	•	•
Air-conditioning		•		•
Radio / CD front loader		•		•

### Brake systems

Front & rear disc brakes	•	•	•	•
ABS with EBD & brake assist	•	•	•	•

## Weight and Dimensions

Overall length (mm)	4782
Overall width (mm) – excluding mirrors	1904
Height (mm)	1965
Wheelbase (mm)	3098
Track width – front/rear (mm)	1615 / 1630
Cargo area volume (m3)	5
Ground clearance laden / unladen (mm)	164 / 192
Cargo-area length (mm)	2415
Cargo-area width min./max /bet. wheels (mm)	1568 / 1663 / 1268
Cargo-area height min. / max. (mm)	1383 / 1387
Sliding door aperture, height / width (mm)	1285 / 1000
Rear door aperture, height / width (mm)	1320 / 1370 – 1390
Rim width (inch)(mm) / tyre size	6.0Jx16 / 205 / 65 R16
Turning circle (m)	11.84
GVM / payload (kg)	2900 / 1141      2700 / 975
Max. axle load front / rear (kg)	1550 / 1650
Trailer load braked / unbraked (kg)	2000 / 750
Fuel tank capacity (l)	90

**Disclaimer:** Specifications are subject to change without notice. While due caution has been exercised in the production of this document possible errors and omissions are unintentional.